

# AGSX12000 FIBREGLASS SEWAGE TANK

Overall Height: 7,315mm (24')  
 Overall Weight: 3,650 lbs (1,659 kg)  
 Capacity: 54,552 L (12,000 Imp Gal, 14,400 US Gal)

TANKS SHALL BE LEAK TESTED THEN INSTALLED AS SPECIFIED IN THE CURRENT INSTALLATION INSTRUCTIONS PROVIDED WITH THE TANK.

MANWAYS AND FITTINGS MUST NOT INTERFERE WITH THE HOLD DOWN LOCATIONS (IF APPLICABLE).

DIMENSIONS ARE NOMINAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBREGLASS CANADA. ANY REPRODUCTION IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF FIBREGLASS CANADA IS STRICTLY PROHIBITED.

### OPTIONAL EQUIPMENT:

- 30" DIA. x 12" H FRP MANWAY     30" DIA. STD LID
- 30" DIA. x 30" H FRP MANWAY     30" DIA. LID W/ POLY NV LID
- 30" DIA. x 60" H FRP MANWAY     FITTINGS
- 30" DIA. x 84" H FRP MANWAY

PLEASE INDICATE ALL REQUIRED OPTIONAL EQUIPMENT. INDICATE ON TANK DRAWING LOCATION OF FITTINGS AND MANWAYS

### SYMBOL IDENTIFICATION

- 4" VENT
- LIFTING LUG

CUSTOMER:

DESTINATION:

INTENDED USE:

PREPARED BY




**Fibreglass  
Canada**

Div. of FRP Manufacturing Inc.

SCALE:	REV:	DRAWN:	DATE:
N.T.S	0	MPS	26/09/07

APPROVED:	DATE:
-----------	-------

DATE:

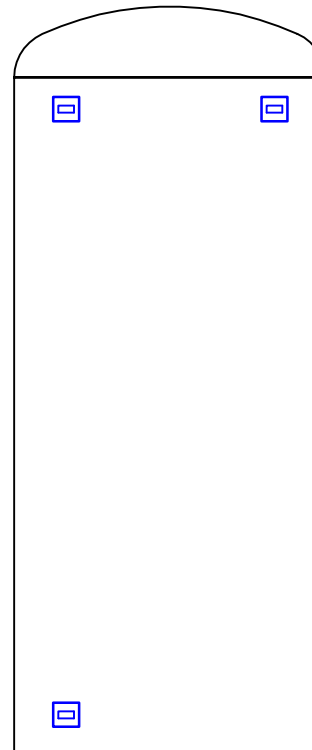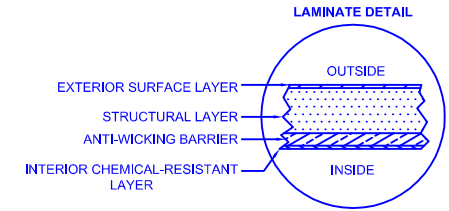

290"  
[7365mm]

260"  
[6604mm]

120"  
[3048mm]